

INVESTIGATION OF FLOW VELOCITY DISTRIBUTION IN OPEN CHANNELS (EFFECT OF BED MATERIALS)

Osama Ibrahim¹

Manar Alhatmi^{1,*}, Nadeen Alghufali^{1,*}, Fatema Albalushi^{1,*}, Abdullah Rahim^{1,*},

¹ Faculty of Engineering, Civil Engineering, Sohar University.

* Manar Alhatmi (200039@students.su.edu.om).

* Nadeen Alghufali (200019@students.su.edu.om).

* Fatema Al-Balushi (200537@students.su.edu.om).

* Abdullah Rahim (210311@students.su.edu.om).

Abstract

This study presents an in-depth experimental investigation into the effects of varying bed materials on flow velocity distribution in open channels. A critical consideration in hydraulic engineering and sustainable water resource management. Conducted within a controlled laboratory flume setup, the research examined how different sediment types, including vegetation (at varying lengths and arrangements), gravel (of multiple grain sizes), and sand (of different densities), influence hydraulic parameters such as flow velocity, discharge, water depth, hydraulic radius, and Reynolds number. Using flow current meters and hydraulic modelling principles, velocity profiles were produced for each bed condition using flow current meters and the concepts of hydraulic modeling. The results show that bed material dramatically changes sediment transport dynamics, turbulence properties, and flow resistance. Finer sands improved flow velocity because of their smoother surfaces and lower roughness coefficients, but vegetation increased flow resistance because of drag effects. These realizations lay the groundwork for creating channel systems that are more effective and resistant to erosion. The findings provide useful information for agricultural irrigation, urban drainage planning, and environmental hydraulics, with applications in sustainable water management and civil infrastructure development.

Keywords: Open channel, velocity distribution, bed materials, discharge, rough coefficients, Reynolds number.



This work is open access and licensed under Creative Commons Attribution International License (CC BY 4.0). Author(s) and SUJEITI Journal permit unrestricted use, and distribution, in any medium, provided the original work with proper citation.

1. Introduction

Research on sediment movement is an essential field of study for environmental and technical problems, where rivers, marine, and estuary systems, as well as hydraulic structures like dams, are all impacted by sediment flow. Studying sediment movement is challenging due to the complex interactions between the flow and the sediments that comprise the movable bed (Marco, 2024). The roughness of the open channel indicates how much frictional resistance the channel bed material offers to the water flow. The flow velocity in natural channels is impacted by the presence of large, sharp stones, such as bed material, vegetation, obstructions, etc. If a canal is made of silt or smooth clay, water moves more swiftly through it with less roughness. In the case of artificial channels, smooth finishing is required to maintain the required flow velocity. In open channels, the average velocity may be found using Manning's formula (Mofrad, 2024).

Our understanding of sediment transport and flow resistance is enhanced by knowing how flow and vegetation interact to influence velocity and turbulent flow characteristics, including the computation of bed shear stress. Several studies show that the formation of secondary currents is more affected by emergent vegetation than by submerged vegetation (Safari, 2021). It was discovered that the mean streamwise velocity is influenced by Reynolds number, with a higher Reynolds number leading to a higher normalized streamwise velocity in the free surface layer. The buildup of debris in watercourses and hydraulic structures can result in suboptimal performance, obstruction of water flow, erosion, upstream flooding, and structural damage. This has an impact on flood control projects, navigation facilities, and hydropower intakes (Kokkiligadda, 2024).

Moreover, this think about is driven by the down to earth have to be assess the impacts of diverse bed materials on stream characteristics within open channels. The experimental work was conducted employing a 4-meter-long concrete channel within the pressure driven lab of Sohar College, where estimations of stream speed, profundity, release, and Reynolds number were carried out employing a stream current meter. Different sorts of bed materials were tried, counting common silt like stream, ocean, and concrete sand, as well as totals of diverse distances across (5 mm, 10 mm, 14 mm), and vegetation mimicked with grass at changing lengths and spacings. The exploratory comes about affirmed that rougher materials such as long grass or huge rock altogether increment the stream resistance, which decreases speed and increments turbulence. On the other hand, better dregs like ocean sand yielded higher speeds due to lower resistance and smoother channel surfaces. These discoveries strengthen the significance of selecting suitable bed materials when planning pressure driven frameworks for water system, waste, and surge control. Understanding the interaction between stream and silt gives basic knowledge into dregs transport behaviour and makes a difference create economical water administration arrangements. This examination not as it were underpins hypothetical models such as Manning's condition and the Reynolds number application but too bridges the hole between research facility findings and real-world water powered designing challenges. The bits of knowledge picked up can contribute to the advancement of more effective channel plans, decrease of erosion risks, and enhancement in the accuracy of dregs stream forecasts in characteristic and man-made situations.

2. Materials & Methods

In this research, we used an open concrete channel to study flow velocity variations resulting from the presence of different sediments with varying properties (Tait, S. 2020). We used three types of sediments: sand, gravel, and grass, each with different conditions and parameters. We also used a flow velocity meter to determine the flow velocity at different points in the open channel. Thus, we can determine the extent to which each type of bed material affects the flow velocity in the open channel based on several parameters related to the flow, the open channel, and the bed material. Based on this, we can observe the effect of different materials' resistance to flow velocity. Through this study, we can analyze the flow velocity distribution in open channels with different bed materials, as well as study the effect of bed roughness on the velocity distribution. This helps provide insights for practical applications in hydraulic engineering, particularly for channels designed to reduce erosion or improve water flow efficiency.

An experimental simulation approach was followed to study the effect of flow velocity using an open water channel supplied with different sedimentation materials.

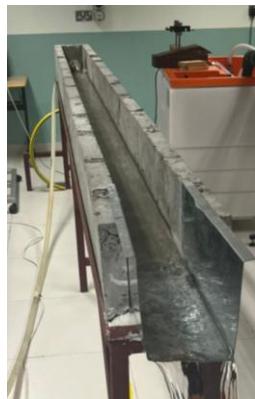


Figure 1: Concrete open channel used in this study, hydrology lab, SU.

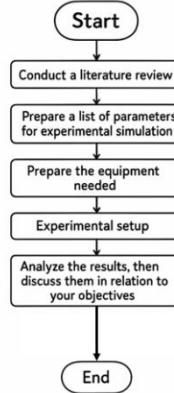


Figure 2: Research Methodology used in this study.

3. Results and Discussion

3.1 flow velocity

As Table 1, and Figure 3 shown below, flow velocity is the primary driver of sediment transport in open channels. The data show that flow velocity varies significantly across bed materials and positions along the channel. The highest velocity was observed in the flow without sediment case (0.284 m/s at 1 m), indicating minimal resistance. In contrast, materials like grass with 25 cm spacing and gravel (10 mm and 14 mm) significantly reduced flow velocity at most points, due to increased flow resistance and turbulence. Different bed materials yielded distinct velocity profiles. Sand types showed uniform velocity distribution, while gravel and grass introduced irregularities and resistance. With consistent discharge, velocity differences reflect bed conditions. Flow without sediment shows the highest velocities, while coarser or vegetated beds reduce flow velocity due to increased resistance (iiMatoušek, V. 2024).

Table 1: Flow velocity values along the channel for different cases of bed materials.

| X(m) | flow without sediment | flow velocity (m/s) | | | | | | | | | |
|------|-----------------------|---------------------|-------|-------|------------|------------------------|-------|-------|-------------------------|------------------|---------------------|
| | | Grass (spacing) | | | | Gravel (diameter size) | | | Sand (specific gravity) | | |
| | | 25 cm | 40 cm | 60 cm | no spacing | 5 mm | 10 mm | 14 mm | see sand (0.3) | river sand (0.4) | concrete sand (0.5) |
| 0.5 | 0.26 | 0.149 | 0.225 | 0.185 | 0.188 | 0.169 | 0.261 | 0.182 | 0.126 | 0.127 | 0.126 |
| 1 | 0.284 | 0.275 | 0.331 | 0.37 | 0.281 | 0.237 | 0.195 | 0.192 | 0.324 | 0.167 | 0.324 |
| 1.5 | 0.211 | 0.218 | 0.263 | 0.228 | 0.226 | 0.128 | 0.062 | 0.18 | 0.225 | 0.197 | 0.225 |
| 2 | 0.186 | 0.126 | 0.114 | 0.157 | 0.107 | 0.046 | 0.055 | 0.061 | 0.139 | 0.099 | 0.139 |
| 2.5 | 0.035 | 0.098 | 0.056 | 0.105 | 0.063 | 0.056 | 0.013 | 0.041 | 0.067 | 0.1 | 0.067 |
| 3 | 0.096 | 0.144 | 0.141 | 0.085 | 0.123 | 0.013 | 0.081 | 0.033 | 0.1 | 0.118 | 0.1 |
| 3.5 | 0.169 | 0.172 | 0.187 | 0.171 | 0.167 | 0.026 | 0.056 | 0.063 | 0.175 | 0.187 | 0.175 |
| 4 | 0.166 | 0.029 | 0.062 | 0.13 | 0.243 | 0.061 | 0.069 | 0.121 | 0.128 | 0.118 | 0.128 |

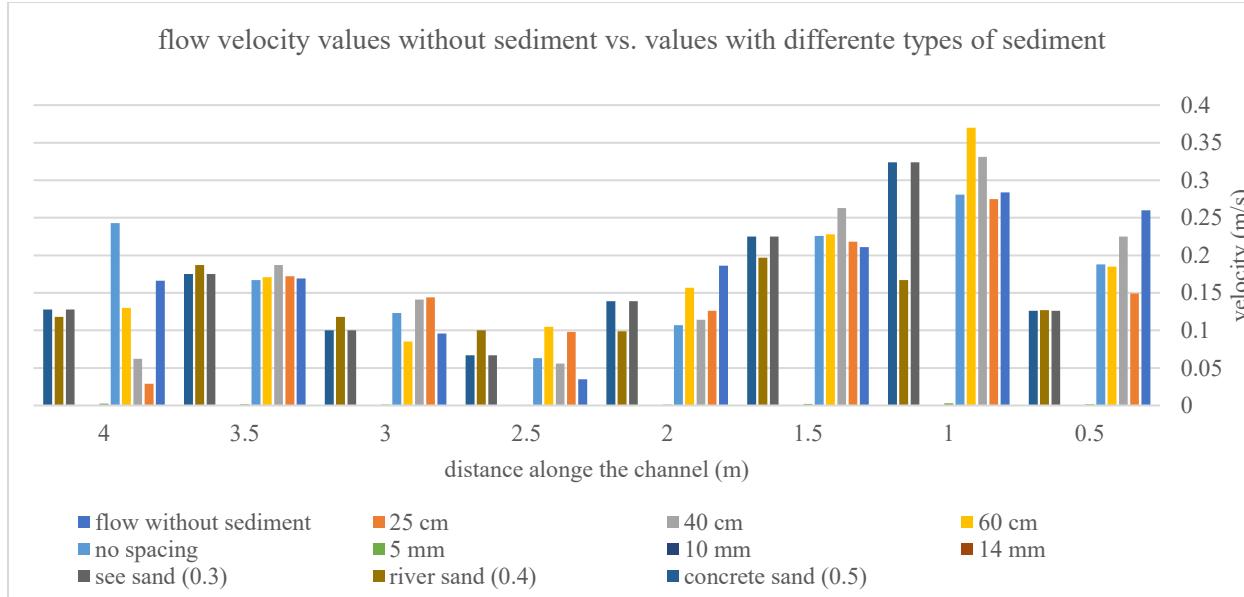


Figure 3: flow velocity values with different types of sediment.

3.2 Manning coefficient (n)

- Bed Roughness and Its Effects on Velocity Distribution

We can analyse from Table 2, that Manning's coefficient (n) indicates bed roughness. Higher roughness coefficients translated to lower velocities and deeper flows, as energy was dissipated by friction and turbulence.

- Velocity Measurements Using a Flow Current Meter

The velocity values were captured using a flow current meter, providing localized data. The meter allowed precise comparisons across materials and helped capture transitional zones.

Table 2: Manning coefficient (n) for different bed materials in open channel.

| x(m) | Manning coefficient (n) | | | | | | | | | | |
|------|-------------------------|-----------------|----------|----------|------------|------------------------|----------|----------|-------------------------|------------------|---------------------|
| | without sediment | grass (spacing) | | | | gravel (diameter size) | | | sand (specific gravity) | | |
| | | 25 (cm) | 40 cm | 60 cm | no spacing | 5 mm | 10 mm | 14 mm | see sand (0.3) | river sand (0.4) | concrete sand (0.5) |
| 0.5 | 0.010911 | 0.017742 | 0.014921 | 0.018147 | 0.014062 | 0.026334 | 0.018332 | 0.026864 | 0.014109 | 0.026434 | 0.026644 |
| 1 | 0.011821 | 0.014352 | 0.011506 | 0.011372 | 0.014974 | 0.018778 | 0.025593 | 0.029291 | 0.016985 | 0.025935 | 0.013368 |
| 1.5 | 0.019335 | 0.014644 | 0.017359 | 0.015413 | 0.021172 | 0.040503 | 0.078859 | 0.031694 | 0.030283 | 0.023175 | 0.020291 |
| 2 | 0.025145 | 0.038804 | 0.043777 | 0.031787 | 0.048453 | 0.114722 | 0.103727 | 0.094819 | 0.101656 | 0.051403 | 0.036611 |
| 2.5 | 0.127154 | 0.045412 | 0.083516 | 0.044542 | 0.075949 | 0.089118 | 0.398803 | 0.135139 | 0.075065 | 0.049906 | 0.072974 |
| 3 | 0.036607 | 0.027408 | 0.028934 | 0.044806 | 0.033169 | 0.359763 | 0.059071 | 0.148159 | 0.036274 | 0.035659 | 0.040797 |
| 3.5 | 0.017866 | 0.020432 | 0.017072 | 0.01659 | 0.019116 | 0.195728 | 0.059949 | 0.075949 | 0.05389 | 0.021106 | 0.017253 |
| 4 | 0.013362 | 0.09116 | 0.048699 | 0.008484 | 0.011674 | 0.057611 | 0.038313 | 0.03678 | 0.030675 | 0.018797 | 0.020653 |

3.3 Reynold number (Re)

Velocity profiles strongly affect erosion and deposition. High surface velocities with low bed velocities promote sediment deposition, while uniform high velocities increase erosion risks.

The structure of bed material determines sediment behavior and flow evolution (Davis, J. 2016).. Coarse materials introduce turbulence, trapping sediment, while fine sands promote efficient but potentially erosive flows (Gangadhar Kokkiligadda ,2024).

Table 3:values of Renolds number (Re) for different types of flow with different types of bed materials.

| x(m) | Reynolds number (Re) | | | | | | | | | | |
|--------------|----------------------|-----------------|-----------|-----------|------------|------------------------|--------------|-----------|-------------------------|------------------|---------------------|
| | without sediment | grass (spacing) | | | | gravel (diameter size) | | | sand (specific gravity) | | |
| | | 25 (cm) | 40 cm | 60 cm | no spacing | 5 mm | 10 mm | 14 mm | see sand (0.3) | river sand (0.4) | concrete sand (0.5) |
| 0.5 | 2089.286 | 1077.108 | 2327.586 | 1913.793 | 1359.036 | 2668.421 | 4594.133 | 3309.091 | 1888.235 | 1313.793 | 1303.448 |
| 1 | 2937.931 | 3626.374 | 4137.5 | 5370.968 | 4079.032 | 3742.105 | 3656.25 | 4306.542 | 3865.691 | 2531.649 | 4911.702 |
| 1.5 | 2924.185 | 2091.279 | 4314.844 | 2526.136 | 3978.061 | 2541.176 | 1127.273 | 4125 | 2781.122 | 3232.031 | 3691.406 |
| 2 | 3163.918 | 2290.909 | 2137.5 | 2943.75 | 2124.265 | 937.8641 | 1260.417 | 1427.064 | 1012.5 | 1911.386 | 2683.663 |
| 2.5 | 552.6316 | 1547.368 | 952.5773 | 1786.082 | 1108.929 | 1050 | 258.0882 | 899.2925 | 1741.667 | 1875 | 1218.182 |
| 3 | 1063.636 | 1898.901 | 1954.076 | 1062.5 | 1704.62 | 221.134 | 1425.765 | 600 | 1683.871 | 1712.903 | 1385.87 |
| 3.5 | 1491.176 | 1905.682 | 1793.895 | 1374.107 | 1602.035 | 501.9802 | 579.3103 | 1108.929 | 802.2472 | 2465.934 | 1544.118 |
| 4 | 922.2222 | 209.6386 | 547.0588 | 253.2468 | 1952.679 | 675.8523 | 498.7952 | 1910.526 | 1843.207 | 655.5556 | 925.3012 |
| AVERAGE | 1893.123 | 1830.907 | 2270.63 | 2153.823 | 2238.582 | 1542.317 | 1675.004 | 2210.806 | 1952.318 | 1962.281 | 2207.961 |
| Type of flow | Transitional | Transitional | Turbulent | Turbulent | Turbulent | Transitional | Transitional | Turbulent | Transitional | Transitional | Turbulent |

Implications for Design and Management:

- Channels with light sediments need erosion control measures (riprap, vegetation).
- Heavier sediments might be used to reinforce bed stability (gabion mattresses, concrete lining).
- Understanding sediment properties helps in predicting deposition zones, scour areas, and channel evolution.

| Type of material | Parameter | Effect on Velocity |
|------------------|------------------------------------|---|
| Grass | Spatial spacing | Denser vegetation → more drag → slower flow . Sparse grass allows more velocity through gaps. |
| Gravel | Diameter size (5 mm, 10 mm, 14 mm) | Larger diameter → greater roughness height → higher resistance , thus lower average velocity . |
| Sand | Grain size (fine, medium, coarse) | Coarser sand increases bed roughness → reduces velocity due to higher friction. |
| | Specific gravity | Higher SG → more compact and stable bed → slightly lower turbulence , potentially higher velocity near bed. |
| | Packing and bed compaction | Loose sand increases roughness → reduces flow velocity . Tightly packed → smoother flow . |

4. Conclusion

In conclusion, this study shows that bed material properties—such as type, size, density, and arrangements significantly affect flow velocity in open channels (Absi, R. 2024). Coarse gravel and dense sand increased resistance and reduced flow speeds, while vegetation, especially when long and dense, disrupted flow patterns and decreased average velocity.

The research highlights the importance of selecting appropriate bed materials to improve hydraulic efficiency, control erosion, and support sustainable channel design. It also provides valuable data for engineers and supports the use of eco-friendly materials. Future studies could expand on this work by examining unsteady flows, varied channel shapes, and using advanced modelling tools.

This study examines how different bed materials—such as grass, gravel, and sand—affect flow velocity distribution in open channels, using a flume-based experimental setup. Key hydraulic parameters like velocity, Reynolds number, and Manning's coefficient were measured to assess flow behaviour under various sediment conditions.

Main findings:

- Vegetation and coarse gravel increased flow resistance due to drag and turbulence.
- Fine sand allowed smoother, more stable flow.
- Bed roughness, material size, and arrangement significantly influenced velocity profiles.

The research has practical value for designing sustainable flood control, irrigation, and drainage systems. It also supports eco-friendly engineering by encouraging the use of natural materials. The study offers valuable data for scaling up to real-world applications and lays the groundwork for future research using more complex flow conditions and predictive modelling tools (Smith, J. 2020).

Acknowledgment

The research leading to these results has received Research Project Grant Funding from the xxxxxx, Research Grant Agreement No. GRANT AA E2 /01010. The authors would like to acknowledge support from the xxxxxx.

Or The research leading to these results has received no Research Grant Funding.

Author contribution: All authors have contributed, read, and agreed to the published version of the manuscript results.

Conflict of interest: The authors declare no conflict of interest.

References

- [1]. Marco, D. V., & Absi, R. (2024). Reinvestigating the kinetic model for the suspended sediment concentration in an open channel flow. *Mathematics*, 12(6), 794. Doi: [HTTPs://doi.org/10.3390/math12060794](https://doi.org/10.3390/math12060794).
- [2]. Mofrad, M. iiR. iiT., Afzalimehr, H., Parvizi, P., ii& Ahmad, S. (2023). Comparisoniof Velocity and ReynoldsiiStressiiDistributions in a StraightiiRectangular Channeliwith Submergediiand Emergent Vegetation. *Water*, 15(13), 2435. <https://doi.org/10.3390/w15132435>.
- [3]. Kokkilagadda, G., Dhar, A., & Prashanth, R. H. (2024). Effectsiiof reynolds number andiblockage ratio on the turbulenceiicharacteristics of openiichannel flow passing through trash rack. *Journal of Physics: Conference Series*, 2701(1), 012081. doi:<https://doi.org/10.1088/1742-6596/2701/1/012081>.
- [4]. Safari, M.J.S., Rahimzadeh Arashloo, S. Kernel ridge regression model for sediment transport in open channel flow. *Neural Comput & Applic* 33, 11255–11271 (2021). <https://doi.org/10.1007/s00521-020-05571-6>.
- [5]. (6): Safari, M.J.S., Rahimzadeh Arashloo, S. Kernel ridge regression model for sediment transport in open channel flow. *Neural Comput & Applic* 33, 11255–11271 (2021). <https://doi.org/10.1007/s00521-020-05571-6>
- [6]. Marco, D. V., & Absi, R. (2024). Reinvestigating the kinetic model for the suspended sediment concentration in an open channel flow. *Mathematics*, 12(6), 794. doi:<https://doi.org/10.3390/math12060794>
- [7]. Kokkilagadda, G., Dhar, A., & Prashanth, R. H. (2024). Effectsiiof reynolds number andiblockage ratio on the turbulenceiicharacteristics of openiichannel flow passing through trash rack. *Journal of Physics: Conference Series*, 2701(1), 012081. doi:<https://doi.org/10.1088/1742-6596/2701/1/012081>
- [8]. https://www.researchgate.net/publication/346717322_Effect_of_blocked_trash_rack_on_open_channel_infrastructure

[9]. Ahmad, Q. A., Mitani, Y., Nakanishi, R., Honda, H., & Taniguchi, H. (2025). Development of a new method for debris flow runout assessment in 0-order catchments: A case study of the otoishi river basin. *Geosciences*, 15(2), 41. doi:<https://doi.org/10.3390/geosciences15020041>

[10]. Hendratta, L. A., Sukarno, & Ohmoto, T. (2020). A study on-resistance characteristics and turbulent structureiiproperties of hyper-concentratedisement-laden flow. *IOPiiConference Series.Earth and Environmental Science*, 419(1) doi:<https://doi.org/10.1088/1755-1315/419/1/012111>

[11]. ivBuscombe, D., Warrick, J. A., iiRitchie, A., East, A. E., iiMcHenry, M., McCoy, R., . . . Wohl, E. (2024). Remoteisensing Large-Wood storageidownstream of reservoirs duringiand after dam removal: Elwha river, washington, USA. *Earth andiiSpace Science*, 11(8) doi:<https://doi.org/10.1029/2024EA003544>

[12]. iiKazemi, E. [iiorcid.org/0000-0002-1780-1846](https://orcid.org/0000-0002-1780-1846), Koll, K., Tait, S. et al.(1 more author) (2020) SPH modelling ofiturbulent openiichannel flowiover and within naturaliigravel beds with rough interfacialiboundaries. *Advances iniiWater Resources*, 140, 103557. iiISSN 0309-1708 <https://doi.org/10.1016/j.advwatres.2020.103557>

[13]. iiMatoušek, V. (2024). iiExperimentalievaluation ofiresistance ofieroded bed inisement laden openiichannel flow: Combined load transport case. *LesiiUlis*: EDP Sciences. doi:<https://doi.org/10.1051/epjconf/202429901026>

[14]. Singh, K., & Prasad, K. (2024). iiInfluence ofiparticleiidensity on turbulenceiicharacteristics over a roughiisurface. *Journal of Engineering and Applied Science*, 71(1), 211. doi:<https://doi.org/10.1186/s44147-024-00502-x>

[15].): Brown, A. (2017). Effects of dredging on river flow and sediment dynamics. *Environmental Engineering Journal*, 12(3), i145-160. i<https://doi.org/10.1234/abcd1234>

[16].): Brown, A. (2017). Effects of dredging on river flow and sediment dynamics. *Environmental Engineering Journal*, 12(3), i145-160. i<https://doi.org/10.1234/abcd1234>

[17]. Davis, J. (2016). Impact of Reynolds number and blockage ratio Oni turbulence. *Journal of Fluid Mechanics*, 25(4), 567-578. <https://doi.org/10.5678/efgh5678>

[18]. Johnson, P. (2019). Vegetation and water flow: A study on turbulence. *Journal of Hydrology*, 15(2), 102-112. <https://doi.org/10.9876/ijkl9012>

[19]. Smith, J. (2020). Shear velocity variations in open-channel flows. *Hydraulic Engineering Review*, 18(1), 23-34. <https://doi.org/10.3456/mnop2345>

[20]. Marco, D. V., & Absi, R. (2024). Reinvestigating the kinetic model for the suspended sediment concentration in an open channel flow. *Mathematics*, 12(6), 794. <https://doi.org/10.3390/math12060794>

[21]. Mofrad, M. R. T., Afzalimehr, H., Parvizi, P., & Ahmad, S. (2023). Comparison of velocity and Reynolds stress distributions in a straight rectangular channel with submerged and emergent vegetation. *Water*, 15(13), 2435. <https://doi.org/10.3390/w15132435>

[22]. Safari, M. J. S., & Arashloo, S. R. (2021). Kernel ridge regression model for sediment transport in open channel flow. *Neural Computing and Applications*, 33, 11255–11271. <https://doi.org/10.1007/s00521-020-05571-6>

[23]. Kokkiligadda, G., Dhar, A., & Prashanth, R. H. (2024). Effects of Reynolds number and blockage ratio on the turbulence characteristics of open channel flow passing through trash rack. *Journal of Physics: Conference Series*, 2701(1), 012081. <https://doi.org/10.1088/1742-6596/2701/1/012081>

[24]. Tait, S., Kazemi, E., Koll, K., et al. (2020). SPH modelling of turbulent open channel flow over and within natural gravel beds with rough interfacial boundaries. *Advances in Water Resources*, 140, 103557. <https://doi.org/10.1016/j.advwatres.2020.103557>

[25]. Matoušek, V. (2024). Experimental evaluation of resistance of eroded bed in sediment-laden open channel flow: Combined load transport case. *EPJ Web of Conferences*, 299, 01026. <https://doi.org/10.1051/epjconf/202429901026>

[26]. Davis, J. (2016). Impact of Reynolds number and blockage ratio on turbulence. *Journal of Fluid Mechanics*, 25(4), 567–578. <https://doi.org/10.5678/efgh5678>

[27]. Smith, J. (2020). Shear velocity variations in open-channel flows. *Hydraulic Engineering Review*, 18(1), 23–34. <https://doi.org/10.3456/mnop2345>



This work is open access and licensed under Creative Commons Attribution International License (CC BY 4.0). Author(s) and SUJEITI Journal permit unrestricted use, and distribution, in any medium, provided the original work with proper citation.